


Filter systems from the plant supplier
Maximum separation efficiency and economy

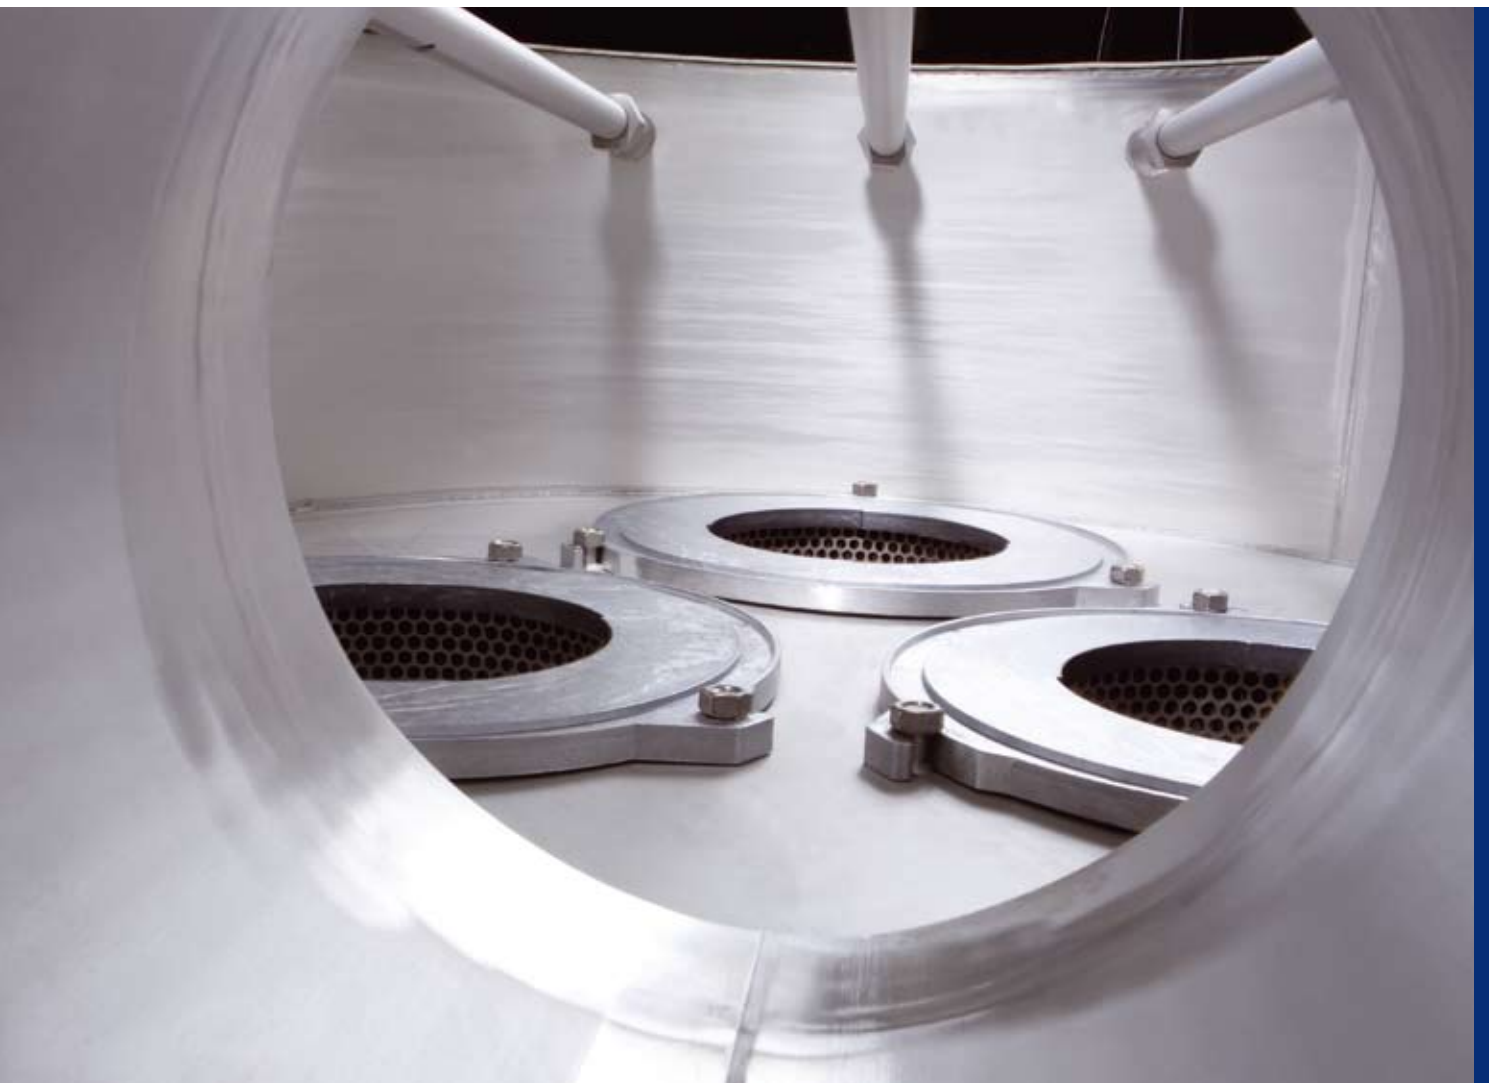

Bin vent filter

Bin vent filters are used, e.g., in silos with pneumatic conveying systems to separate dust particles from the conveying air. The raw gas inlet and the dust outlet are located in one connection. A special type of bin vent filter, the built-in filter, offers both low maintenance and a compact design thanks to the filter elements which protrude into the silo.

Design characteristics:

- cleaning: pneumatic
- filter elements: filter hoses / filter bags
- housing: round / rectangular
- installation of filter elements: horizontal / vertical
- special design: built-in filter



Bin vent filter



Filter hoses

Performance:

Flow rate: 500 – 20,000 m³/h

Temperature: 130° C

Pressure: -0.5 to 4 bar g

Dust collector

Dust collectors are filter systems with a funnel-shaped bin integrated in the raw gas chamber for storage of the product. The filter elements (mostly filter hoses or filter bags) are cleaned pneumatically. Filling level indicators are foreseen in order to avoid too high filling levels and damage to the filter elements. The product is either discharged via the conveying pipe or filled in transportable containers.

Design characteristics:

- cleaning: pneumatic
- filter elements: filter hoses / filter bags
- housing: round / rectangular
- installation of filter elements: horizontal / vertical
- filtration: one-step or two-step
- heating of the shell



Dust collector with two-step filtration

Performance:

Flow rate: 1,000 – 30,000 m³/h

Temperature: max. 150° C

Pressure: -0.5 to 10 bar g

Safety filter

Safety filters are installed in systems between the existing filter and the blowers or compressors. Filter cartridges serve as filter elements. Since safety filters only come into effect as backup in case of damage or malfunction of the main filter, cleaning is normally not required for this type of filter.

Design characteristics:

- cleaning: pneumatic or with storage filter
- filter elements: filter cartridges
- housing: round
- installation of filter elements: vertical



Safety filter



Filter cartridge

Performance:

Flow rate: 200 – 24,000 m³/h

Temperature: max. 130° C

Pressure: -0.5 to 5 bar g

Suction filter


Suction filters are used for cleaning the intake air of condensers and blowers.

Filters are available in various designs and sizes according to the process and stability requirements. Weather protection hoods and sound absorbers are available on request.

Suction filters can be easily flange-mounted to existing connections.

Design characteristics:

- cleaning: pneumatic
- filter elements: filter hoses / filter bags
- housing: round / rectangular
- installation of filter elements: horizontal / vertical



View from below of a suction filter with filter cartridges



Suction filter

Performance:

Flow rate: 500 – 15,000 m³/h

Temperature: max. 80° C

Pressure: 0 bar g

The Zeppelin Group of companies: All specialists under one roof

Zeppelin Silos & Systems GmbH

Leutholdstr. 108
88045 Friedrichshafen
Germany
E-mail: zentral.fn@zeppelin.com

Zeppelin Belgium N.V.

Munsterenstraat 9
3600 Genk
Belgium
E-mail: zeppelin.belgium@zeppelin.be

Zeppelin Technology Far East Pte, Ltd.

237 Alexandra Road
#03-03/04/05 The Alexcier
Singapore 159929
Singapore
E-mail: info@zeppelin.sg

Zeppelin Systems USA, Inc.

11050 West Little York
Building D
Houston, TX 77041
USA
E-mail: zeppelin-usa@zeppelin-usa.com

JMB Zeppelin Equipamentos Industriais Ltda.

Rua João XXIII, N° 650
Bairro Cooperativa
CEP 09851-707
São Bernardo do Campo
São Paulo
Brazil
E-mail: info@jmbz.com.br

Zeppelin Systems India Pvt. Ltd.

Level 4 – ADM-Building
Alembic Campus
Alembic Road
Vadodara - 390003
India
E-mail: info@zeppelin-india.com

Zeppelin Solid Technology (Beijing) Co. Ltd.

111#, Parkview Center
No. 5, Fangyuan West Road
Chaoyang District
Beijing 10016
China
E-mail: office@zeppelin-china.com

Zeppelin Plast Tech S.r.l.

Centro Direzionale „Summit“
Palazzo „C“/Via Brescia, 26
20063 Cernusco sul Naviglio (MI)
Italy
E-mail: info@zeppelin-zi.com

Zeppelin Systems Ltd.

Multiflex 5, Core 27
Little Oak Drive
Sherwood Business Park
Annesley
Nottingham NG15 0EB
United Kingdom
E-mail: info@zeppelin-uk.com

Zeppelin Representative Office Moscow

Leninskij Prospekt 95 A, Room 464
119313 Moscow
Russia
E-mail: marcus.reichmann@zeppelin.com

Zeppelin Gulf Company Ltd.

Dammam-Jubail Highway
Juaymah
P.O. Box 9998, Dammam 31423
Kingdom of Saudi Arabia
E-mail: zeppelingulf@zeppelin-gulf.com

Zeppelin Silo ve Sistemleri Imalat Sanayi Ticaret A.S.

F. Kerim Gökay Cad.
Ortabahar Sok. No. 6/32
34732 Göztepe – Istanbul
Turkey
E-mail: mehmet.tuerker@zeppelin-tr.com



Presented by:

Please visit our web site:
<http://www.zeppelin-industry.com>
© Zeppelin Silos & Systems GmbH,
SD 02/09. Subject to modifications
without notice. (Filter systems from
the plant supplier)